


APC 7900



http://www.apcc.com/resource/include/techspec_index.cfm?base_sku=AP7900

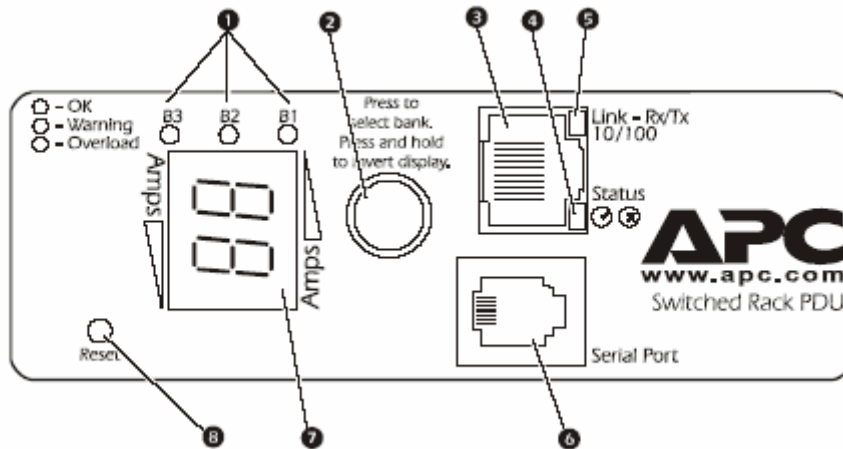

The RJ-12 Serial Port Connects the Rack PDU to a terminal emulator program for local access to the control console. You can use the supplied serial cable 940-0144.

Custom cabling required to connect Opengear CM4000 to an APC-7900:

APC7900 RJ-12 to Opengear DB-9

Pin3(TxD)	-----	Pin 2(RXD)
Pin4(RXD)	-----	Pin3(TxD)
Pin5(grnd)	-----	Pin5(GRND)
Pin2(grnd)	-----	Pin5(GRND)
Pin1 and 6	-----	Pin1

AP7900 RJ-12 to Opengear RJ45

2	----	6
3	----	4
4	----	5
5	----	6

On the RJ-12 Pin-1 loops back to pin-5